


The All Black stars



Denim All Black Glass Glass Bifacial 430Wp

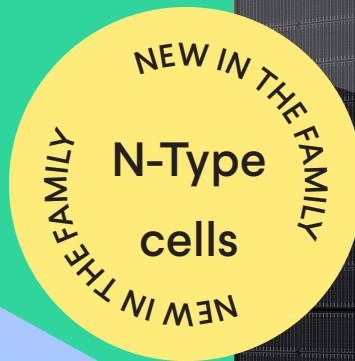

denim

SOLAR, IT'S THAT SIMPLE

N-TYPE ALL BLACK GLASS GLASS BIFACIAL MODULES

The Denim All Black Glass Glass BiFacial is an aesthetic high-flyer with a compact design and 1.6mm glass on both the front and rear sides. As a result, the solar module is better protected against moisture and mechanical stress. The outcome? A module efficiency of 22% and an impressive product and power warranty of up to 30 years.

PRODUCT CERTIFICATIONS



WARRANTY

30-year product warranty.


30-year linear power output warranty.

Always assured of a good yield thanks to the long product warranty of up to 30 years. After 30 years, we guarantee an output of 87.4%.

denimsolar.com

Denim All Black Glass Glass Bifacial 430Wp

ENGINEERING DRAWING

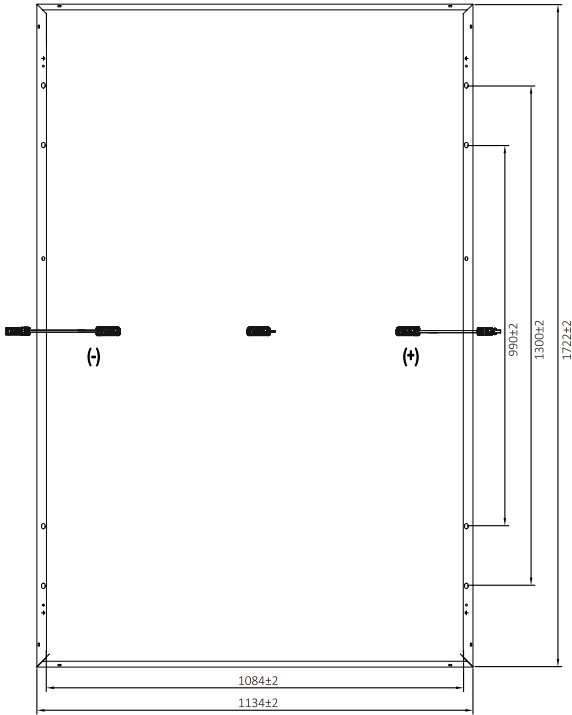

ELECTRICAL CHARACTERISTICS

		STC ¹	NOCT ²
Maximum Power (Pmax)	(W)	430	327
MPP Voltage (Vmpp)	(V)	31.90	30.60
MPP Current (Impp)	(A)	13.50	10.69
Open Circuit Voltage (Voc)	(V)	38.30	36.80
Short Circuit Current (Isc)	(A)	14.23	11.47
Module Efficiency	(%)	22.02	
Power Tolerance	(W)	0 / +5	
Operating Temperature	(°C)	-40 to +85	
Maximum System Voltage	(V)	DC 1500	
Maximum Series Fuse Rating	(A)	25	
Product reference		Denim U N3 430 BBG 108H	


¹ STC (Standard Test Conditions): Irradiance 1000W/m², Cell temperature 25°C, Air mass 1.5

² NOCT (Nominal operating cell temperature): Irradiance 800W/m², Ambient temperature 20°C, Wind speed 1m/s

ELECTRICAL CHARACTERISTICS WITH DIFFERENT REAR SIDE POWER GAIN

		5%	10%	15%	20%
Rear Gain					
Maximum Power (Pmax)	(W)	452	473	495	518
MPP Voltage (Vmpp)	(V)	31.90	31.90	31.90	32.00
MPP Current (Impp)	(A)	14.18	14.85	15.53	16.20
Open Circuit Voltage (Voc)	(V)	38.30	38.30	38.30	38.40
Short Circuit Current (Isc)	(A)	14.94	15.65	16.36	17.08


DENIM IV CURVES

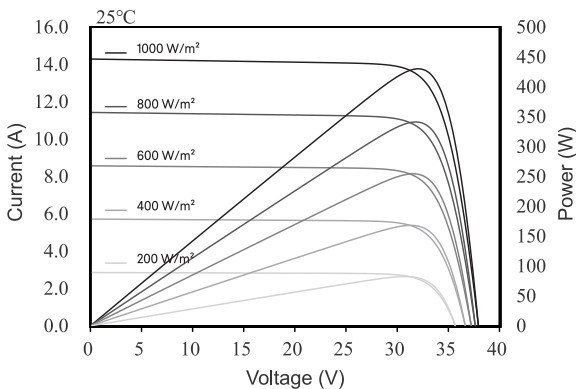

MECHANICAL PROPERTIES

Cell type	N-Type TOPCon 182x91 mm
Number of cells	108 cells (6 x 18)
Dimensions	1722 x 1134 x 30 mm / 1.95 m ²
Weight	21.0 kg
Frame	Anodized aluminium
Front Glass	1.6mm Heat strengthened glass
Back Glass	1.6mm Heat strengthened glass
Junction Box	IP68, 3 diodes
Cable cross section/length	4 mm ² (IEC) - 1100 mm
Connector type	Stäubli - MC4-EVO2
Fire rating	Class A according to UL790
Snow load	Up to 5400 Pa
Wind load	Up to 2400 Pa
Hail test	Hailstones: Ø 25 mm, speed: 23 m/s

SUPERIOR WARRANTY

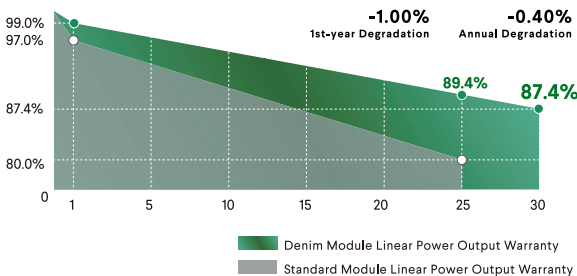

30 Years
Product Warranty

30 Years
Linear Power Output Warranty

TEMPERATURE RATINGS & BIFACIALITY

NOCT	43±2 °C
Temperature Coefficient of Pmax	-0.30 %/°C
Temperature Coefficient of Voc	-0.25 %/°C
Temperature Coefficient of Isc	0.046 %/°C
Bifaciality	80±5%

NUMBER OF PACKAGES

Quantity per pallet	36 pcs
Quantity per container	26 pallets / 936 pcs
Pallet dimensions	1759*1132*1266 mm
Pallet weight	791 kg
Max stackable pallets	2 pallets